




SUPPLEMENTARY MANUAL
for XT-S01

REMOVE THE BLACK FRAME COVERS
FROM LEFT AND RIGHT SIDE
BELOW SEAT.
REMOVE THE MAIN SEAT.



LIFT UP OR REMOVE THE
FUEL TANK.

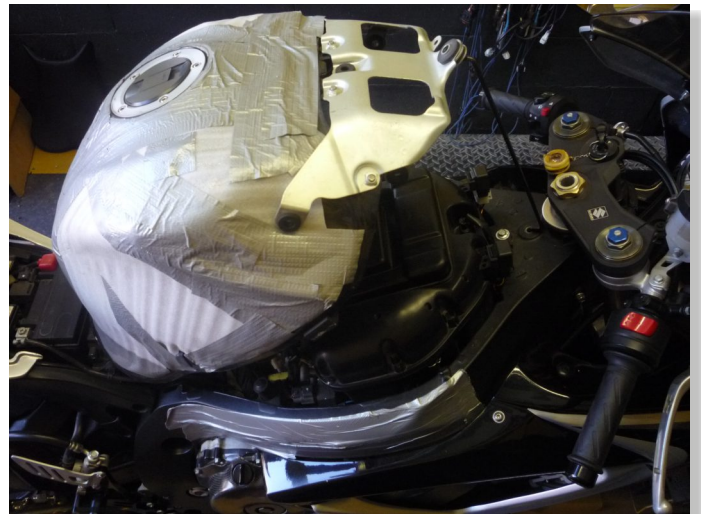

PLUG X-TRE CONNECTORS IN-LINE
WITH THE GEAR POSITION SENSOR
CONNECTORS.

(WHITE, 3-POLE TRIANGULAR CONNECTORS
BELOW THE FUEL TANK AT LEFT SIDE)

MOUNT THE X-TRE BOX TO THE
INNER SIDE OF THE FRAME BY THE
SUPPLIED VELCRO STRIPS,
AND SECURE THE BOX AND CABLES
WITH CABLE TIES.



Suzuki GSX-R600

2006-2007




CUT THE BLACK/GREEN WIRE ABOUT 4CM (1.6") AWAY FROM THE ECM CONNECTOR.

(BLACK CONNECTOR, PIN #6)

CONNECT THE X-TRE BLACK/GREEN WIRE TO BLACK/GREEN WIRE END, WHICH GOES TO THE ECM CONNECTOR.

CONNECT THE X-TRE BLACK/WHITE WIRE TO BLACK/GREEN WIRE END, WHICH IS AT THE WIRING HARNESS SIDE.

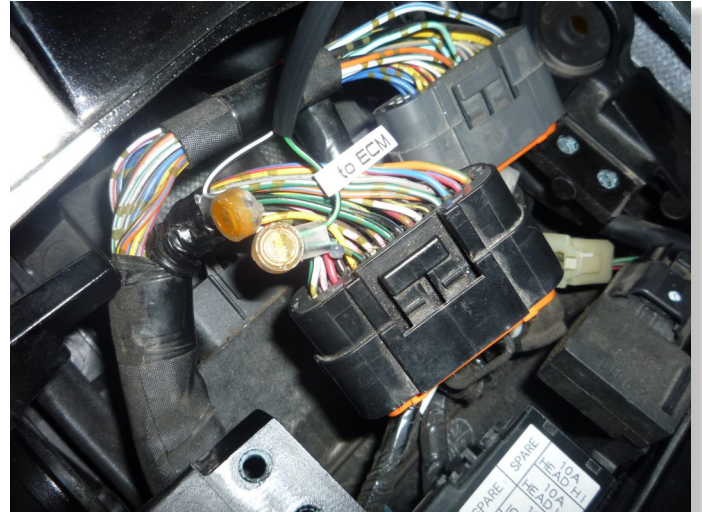

CONNECT X-TRE RED WIRE TO ORANGE/GREEN WIRE OF REAR BRAKE LIGHT SWITCH CONNECTOR.

(TRANSPARENT, 2-POLE CONNECTOR BELOW FUEL TANK)

(X-TRE MODE: 6)

