XENA SECURITY LOCKFITTER

XENA
INTELLIGENT SECURITY

*Distance form locking-pin to back of disc-slot

ALIGN WITH ▲ EDGE OF DISC

Move template this way to line up holes

Move template this way to line up holes

• 43mm •
• 47mm •
X1
6mm

XX14
14mm

X2
14mm

• 44mm •

• 37mm •
• 42mm •
XX6
6mm

XX6 Stainless-Steel
XZZ6L
6mm

• 60mm •

• 46mm •
XX15
14mm

XX10
10mm

〉 7mm 〈

▶ Check disc thickness here ▶   ◀ Check disc thickness here
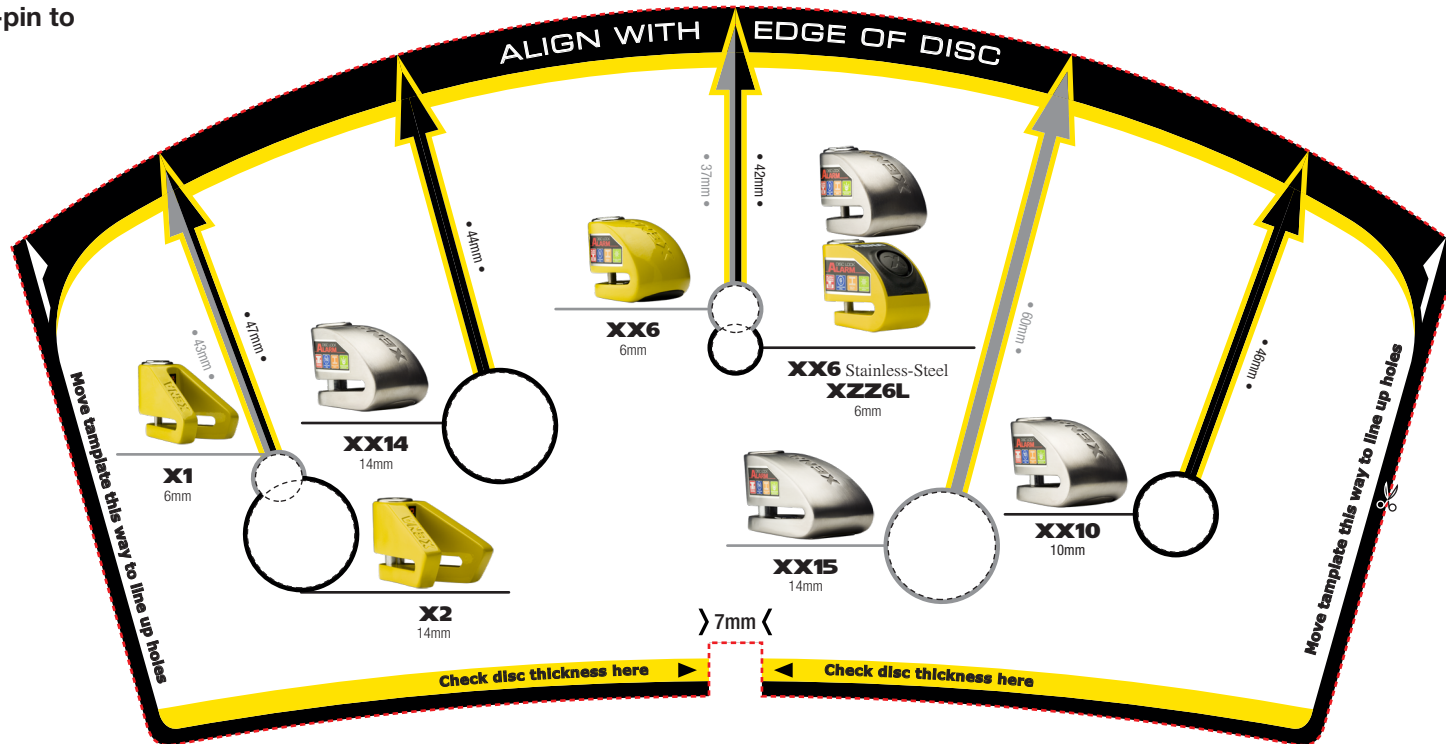
Area for cut out

---

1 Brake-disc thickness standard on all XENA disc-locks at 7mm

▶ Area for locking pin

▶ Required thickness of brake-disc: less than 7mm (1/4")

2 Print the XENA lockfitter at 100% and cut out the area instructed

3 Place the XENA lockfitter on the brake disc to see which XENA disc-lock is best-suited to your motorcycle's brake disc

▶ **XENA** lockfitter

▶ Brake-disc